



Europäisches Patentamt  
European Patent Office  
Office européen des brevets

Publication number:

**0 354 601  
A2**

⑫

## EUROPEAN PATENT APPLICATION

⑪ Application number: 89200737.8

⑤ Int. Cl.<sup>4</sup> **G11B 7/24 , G11B 7/00**

⑫ Date of filing: 22.03.89

⑬ Priority: 12.08.88 JP 202542/88

⑭ Date of publication of application:  
14.02.90 Bulletin 90/07

⑮ Designated Contracting States:  
FR NL

⑰ Applicant: **PIONEER ELECTRONIC  
CORPORATION**  
No. 4-1, Meguro 1-chome  
Meguro-ku Tokyo 153(JP)


⑱ Inventor: Chikuma, Kiyofumi- Pioneer  
Electronic Corporation  
Corp. Res. and Dev. Lab. No. 1-1, Fujimi  
6-chome  
Tsurugashima-machi Iruma-gun Saitama(JP)

⑲ Representative: Smulders, Theodorus A.H.J.,  
Ir. et al  
Vereenigde Octrooibureaux Nieuwe Parklaan  
107  
NL-2587 BP 's-Gravenhage(NL)

⑤④ Optical information recording medium providing reflected light at two different wavelengths, recording apparatus utilizing the same.

⑤⑦ Recording medium having islands of light-emitting material in regions formed between a transparent substrate, and a reflective layer disposed on one principal surface thereof. The islands of light-emitting material are sensitive to illuminating light incident thereupon, and in response thereto, emit light having a different wavelength than said illuminating light. Reproducing apparatus separates an overall reflected light from the recording medium into first reflected light corresponding to a reflected scanning light, and second reflected light corresponding to emitted light from the light emitting material.

*Fig. 1*

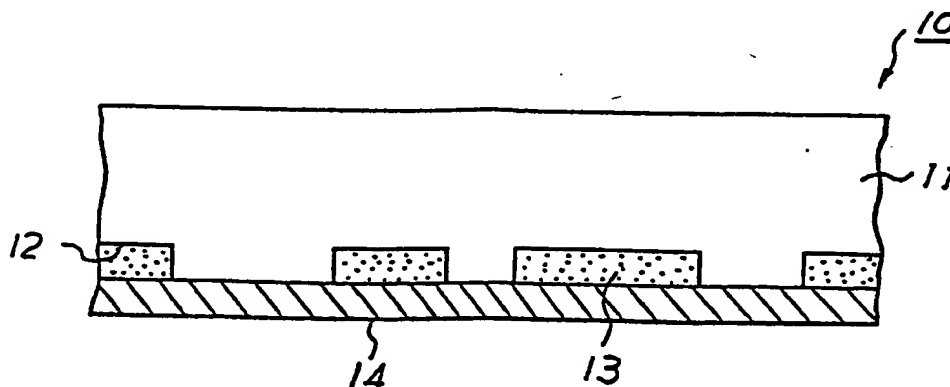

EP 0 354 601 A2

OPTICAL INFORMATION RECORDING MEDIUM PROVIDING REFLECTED LIGHT AT DIFFERENT  
WAVELENGTHS, RECORDING APPARATUS UTILIZING THE SAME

TECHNICAL FIELD

The present invention relates to an optical information recording medium and a recording apparatus  
5 utilizing the same.

BACKGROUND OF THE INVENTION

10 Optical information recording media, typically optical disks such as compact disks and video disks, are designed to record information utilizing the presence or absence of small pits (i.e., arranged in an array along circular or spiral "tracks"), wherein reproduction of recorded information is performed by detecting said presence or absence of small pits using an optical pickup and producing an electrical signal  
15 corresponding thereto. In some optical disks, recorded information is detected by directing a light beam along a track and monitoring a difference in the reflectance of a small region on account of pigments or phase change, and producing the electrical signal according to this difference.

An information recording-reproducing system using the optical disks described above have such frequency characteristics that the amount of information (stored via the presence or absence of pits or  
20 regions) that can be detected is limited by a spatial frequency which is  $2NA/\lambda$  at maximum, where NA is a numerical aperture of a lens in a reproducing optical system, and  $\lambda$  is a wavelength of information detecting light. Therefore, any efforts toward increasing a recording density of information on optical disks (e.g., by such techniques as mastering) have been limited by a fact that the only information that can be detected is that within the spatial frequency  $2NA/\lambda$ .

Summary of the Invention

30 An object, therefore, of the present invention is to provide an optical information recording medium that allows information to be recorded and reproduced at an increased density.

Another object of the present invention is to provide a reproducing apparatus utilizing such as a recording medium.

The first object of the present invention can be attained by an optical information recording medium  
35 which has islands of light-emitting material in regions formed between a transparent substrate, and a reflective layer disposed on one principal surface thereof. The islands of light-emitting material are sensitive to illuminating light incident upon the other principal surface of said substrate, and responsive thereto, emit light having a different wavelength than said illuminating light. This medium is adapted such that a recorded information surface comprises record information in accordance with an array of said islands of light-  
40 emitting material (e.g., arranged along circular or spiral "tracks").

The second object of the present invention can be attained by a playing apparatus using the above-described optical information recording medium. In such an apparatus, said recording medium is illuminated with a small spot of scanning light directed to scan the recorded information surface, and reflected light  
45 from the recording medium is separated into first reflected light corresponding to reflected scanning light, and second reflected light corresponding to reflected or emitted light from the light-emitting material. A focus error signal is generated on a basis of a reception output of the first reflected light, while recorded information and a tracking error signal are read and generated on a basis of a reception output of the second reflected light.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a cross-sectional view of an optical information recording medium according to an

embodiment of a first aspect of the present invention;

FIG. 2 is a schematic diagram showing a reproducing apparatus according to an embodiment of a second aspect of the present invention; and

FIG. 3 is a diagram illustrating a concept of the frequency characteristics of a recording/reproducing system using the recording medium of the present invention.

### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Embodiments of the present invention are described hereinafter with reference to the accompanying drawings.

FIG. 1 is a cross section of an optical information recording medium according to an embodiment of a first aspect of the present invention. The optical information recording medium 10 has a transparent substrate 11 that is made of a resin such as an acrylic or polycarbonate resin, and which has rows of small recesses 12 formed in an array in a spiral or concentric pattern in one principal surface thereof. The recesses 12 in the substrate 11 are individually filled with a light-emitting filter material to provide islands of light-emitting material or region 13. The filler material is sensitive to illuminating light incident on the other principal surface of the substrate 11 and, responsive thereto, emits light having a different wavelength than the illuminating light. Suitable light-emitting materials are photoluminescent materials, fluorescent dyes, phosphors, etc. An outermost side of the light-emitting region 13 is coated with a reflective layer 14, which reflects both the illuminating light coming from the other principal surface of the substrate and the light emitted from the light-emitting region 13.

The substrate 11 of the recording medium 10 having the structure described above may easily be replicated from a stamper which is prepared in any known "mastering" step of the conventional process of optical disk fabrication. Therefore, information is recorded in accordance with an array of light-emitting islands of light-emitting material 13 formed within the recesses 12.

The construction of a playing apparatus utilizing the above-disclosed recording medium 10 is described hereinafter with reference to FIG. 2 illustrating an embodiment of this apparatus. Incoherent diffusive light issuing from a light source 21 such as a semiconductor laser is converted to parallel rays by passage through a collimator lens 22. After being reflected from a beam splitter 23, the parallel rays of light are converged with an objective lens 24 to form a small spot of scanning light which illuminates or is directed to scan the information recording surface of the recording medium 10. Upon illumination, the light-emitting material, such as a photoluminescent material in the islands of light-emitting region 13 of the recording medium 10, will emit light having a different wavelength than the illumination or scanning light. The emitted light is reflected from the reflective layer 14, which also reflects the illumination light incident on areas where no light-emitting region is formed.

The reflected light from the recording medium 10 passes successively through the objective lens 24 and the beam splitter 23 and is converged by a condenser lens 25 for launching into a dichroic mirror 26. The dichroic mirror 26 is a kind of interference filter having wavelength characteristics which transmit a first reflected light corresponding to a reflected said scanning light which was originally emitted from the light source 21, while reflecting a second reflected light corresponding to a reflected or emitted light from the light-emitting material or region 13, thereby separating an overall reflected light into two kinds of reflected light having different wavelengths.

The light passing through the dichroic mirror 26 is given astigmatism and converted to an electrical signal by a "four-division" or four-quadrant photodetector 27. The light reflected from the dichroic mirror 26 passes through a pinhole 28 and is converted to an electrical signal by a photodetector 29.

From the four outputs of the four-division photodetector 27, a focus error signal can be generated by a well-known "astigmatism method" which determines a difference between the two output sums of diagonal elements. By driving the objective lens 24 in an optical axial direction on a basis of the generated focus error signal, the focal plane of the objective lens 24 can be brought into alignment with a recorded information surface of the recording medium 10.

In contrast, the output from the photodetector 29 is directly picked up as an information read signal. At the same time, a tracking error signal is generated from said output from the photodetector 29 by a well known "wobbling method" which determines a differential output from the photodetector 29 for two phases (90° and 270°) by swinging a small spot of light slightly from right to left and vice versa. This tracking error signal is used to control a position of a small spot of light in a direction perpendicular to the row of islands of light-emitting material 13, thereby allowing the small spot of illumination or scanning light to be always maintained on a row of islands of light-emitting material 13.

The frequency characteristics of a recording/reproducing system utilizing the optical information recording medium 10 of the present invention are described below the reference to FIG. 3 illustrating the operating theory of the system.

Light issuing from a light source  $a_1$  passes through a lens  $a_2$  to be converged at a small light-emitting region  $a_3$  on an information recording surface. If the intensity  $I$  of the spot of converged rays from the light source is written as  $I_0(u,v)$ , this intensity can be expressed by:

$$I_0(u,v) = \left| \int \int f_1(x,y) \exp \left[ i 2\pi \frac{NA}{\lambda} \cdot (ux + vy) \right] dx dy \right|^2$$

where  $\lambda$  is a wavelength of outgoing light,  $NA$  is a numerical aperture of lens  $a_2$ ,  $f_1(x,y)$  is a pupil function of lens  $a_2$ , and  $\Omega$  is the pupil plane. For sake of simplicity, assume here that the recording medium is so constructed as to cause cyclic changes in an intensity of light emission. In other words, assume that when using  $I_0(u,v)$  (which is the intensity of the spot produced by the light from the light source), the intensity  $I_R(u,v)$  of light emission from a given area  $a_3(u,v)$  on the recording medium is expressed by:

$$I_R(u,v) = A \left\{ B + I_0(u,v) \cos \left[ \frac{2\pi(u-st)}{p} \right] \right\}$$

where  $A$  and  $B$  are constants of reflection intensity,  $p$  is a period of the cyclic change in emission intensity,  $s$  is a speed at which the spot of scanning light moves on the recording medium, and  $t$  is the time. When the spot of light radiated from the light-emitting area  $a_3(u,v)$  is projected onto a given surface  $a_4(u',v')$ , the resulting image will have an intensity which can be expressed by:

$$I_s(u',v') = \int \int f_2(x,y) \exp \left[ i 2\pi \frac{NA_1}{\lambda_1} \cdot \{ (u-u')x + (v-v')y \} \right] dx dy \int^2 I_R(u,v) du dv$$

Where  $NA_1$  is a numerical aperture of lens  $a_3$ ,  $\lambda_1$  is a wavelength of emitted light, and  $f_2(x,y)$  is a pupil function of lens  $a_3$ . The output  $I$  of a photodetector  $a_5$  can be expressed by:

$$I = \int \int I_s(u',v') \delta(u',v') du' dv'$$

where  $\delta$  is Dirac's  $\delta$  function. In calculating  $I$ , one will be able to see that a frequency band of an output signal from photodetector  $a_5$  is limited by a numerical aperture of lens  $a_3$ . Computing the specific circumstances of this limitation shows that a temporal signal with a frequency of  $s/p$  is obtained when:

$$\frac{1}{p} \leq 2 \frac{NA}{\lambda} + 2 \frac{NA_1}{\lambda_1}$$

Therefore, information that can be read with the recording medium of the present invention should have a spatial frequency of  $(2NA/\lambda)$  ( $2NA_1/\lambda_1$ ). Since this value is higher than that of the spatial frequency  $(2NA/\lambda)$  limitation attributable to the inferior system described in the Background section, a conclusion is reached that the system of the present invention allows more information to be written in and read out of a given area of a recording medium.

It is to be noted that the concept of the present invention is applicable not only to optical disks such as compact disks and video disks but also to other recording media such as optical cards.

As should now be apparent from the foregoing discussions, the optical information recording medium of the present invention has islands of light-emitting material or region formed between a transparent substrate, and a reflective layer disposed on one principal surface thereof. The islands of light-emitting material are sensitive to illuminating light incident upon the other principal surface of said substrate, and responsive thereto, emits light having a different wavelength than said illuminating light. This medium is so adapted to record information in accordance with an array of said islands of light-emitting material. Because of this arrangement, a cutoff value of spatial frequency that limits information detection is doubled as compared to a described inferior system, thereby allowing information to be recorded and reproduced at an

increased density.

The apparatus of the present invention for reproducing with this recording medium is designed such that it illuminates the medium with a small spot of scanning light that scans its recorded information surface, and separates an overall reflected light from the recording medium into two types of reflected light having different wavelengths. A focus error signal can be generated on the basis of a first kind of reflected light, whereas a second kind of reflected light is used as a basis for reading the recorded information and generating a tracking error signal. This design has the advantage of simplifying a composition of the optical system for use in a reproducing apparatus.

10

## Claims

1. An optical information recording medium comprising:  
transparent substrate means;
- 15 reflective layer means provided on a first principal surface of said substrate means; and  
island means of light-emitting material formed between said substrate means and said reflective layer means, said island means being sensitive to illuminating light incident thereupon, and in response thereto, for producing emitting light having a different wavelength than said illuminating light,  
said recording medium being adapted such that a recording information surface corresponds to an array of  
20 said island means of light-emitting material.
2. An optical information recording medium according to Claim 1, wherein said island means being sensitive to illuminating light incident upon a second principal surface of said substrate means.
3. An optical information recording medium according to Claim 1, wherein said light-emitting material is a photoluminescent material.
- 25 4. An optical information recording medium according to Claim 1, wherein said light-emitting material is a fluorescent dye.
5. An optical information recording medium according to Claim 1, wherein said light-emitting material is a phosphor.
6. An optical information recording medium according to Claim 3, wherein said transparent substrate  
30 means is made of a resin.
7. An optical information recording medium according to Claim 6, wherein said transparent substrate means is more specifically an acrylic resin.
8. An optical information recording medium according to Claim 6, wherein said transparent substrate means is more specifically a polycarbonate resin.
- 35 9. An optical information recording medium according to Claim 6, wherein said recording medium corresponds to a compact disk.
10. An optical information recording medium according to Claim 6, wherein said recording medium corresponds to a video disk.
11. An optical information recording medium according to Claim 6, wherein said recording medium  
40 corresponds to an optical card.
12. An optical information recording medium according to Claim 9, wherein said island means of light-emitting material are arrayed in a spiral or concentric form.
13. An optical information recording medium according to Claim 10, wherein said island means of light-emitting material are arrayed in a spiral or concentric form.
- 45 14. An apparatus for reproducing an optical information recording medium comprising:  
illuminating optical system means for producing a small spot of scanning light for scanning said array of said recording medium;  
separating optical system means for separating an overall reflected light from said recording medium into first reflected light corresponding to reflected said scanning light, and second reflected light corresponding  
50 to said emitting light from said light-emitting material;  
first light-receiving means for receiving said first reflected light; and  
second light-receiving means for receiving said second reflected light;  
said reproducing apparatus generating a focus error signal on a basis of an output of said first light-receiving means, and reading recorded information on a basis of an output of said second light-receiving  
55 means and generating a tracking error signal in response thereto.
15. A reproducing apparatus according to Claim 14, wherein said optical information recording medium is set forth in Claim 1.
16. A reproducing apparatus according to Claim 14, wherein said optical information recording medium

is set forth in Claim 6.

17. A reproducing apparatus as claimed in Claim 14, wherein said separating optical system means is an optical beam splitter means having separator means directing a passage of said first reflected light to said first light-receiving means, and directing a passage of said second reflected light to said second light-receiving means.

18. A method of providing increased recorded information density on an optical recording medium, said method comprising the steps of:

providing transparent substrate means;

providing reflective layer means on a first principal surface of said substrate means;

providing island means of light-emitting material formed between said substrate means and said reflective layer means, said island means being sensitive to illuminating light incident thereupon, and in response thereto, for producing emitting light having a different wavelength than said illuminating light;

separating an overall reflected light from said recording medium into first reflected light corresponding to a reflected said illuminating light, and second reflected light corresponding to said emitting light.

FIG. 1

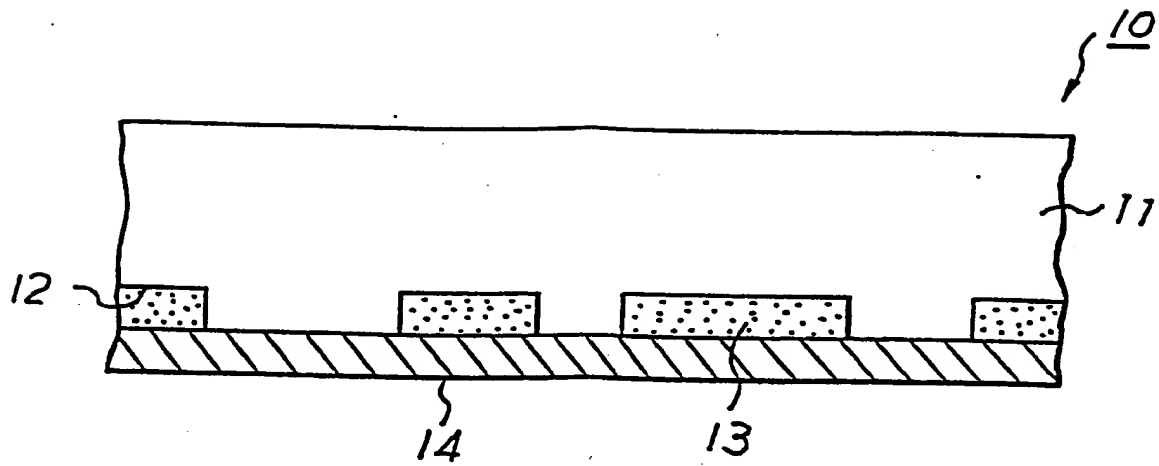


FIG. 3


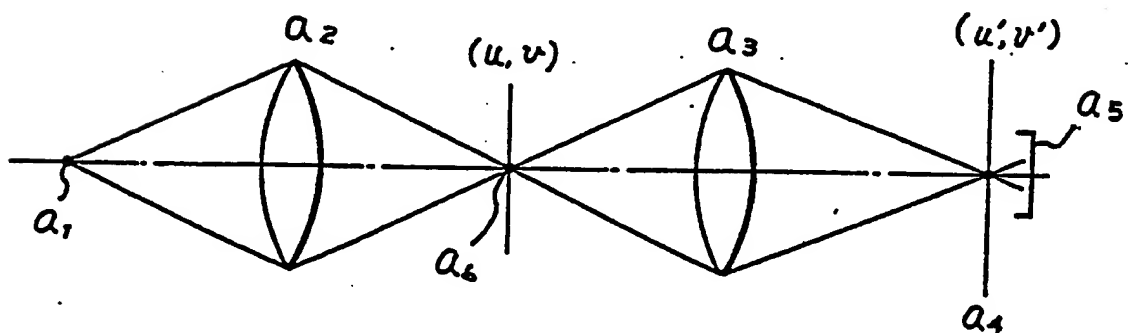


FIG. 2





(19)

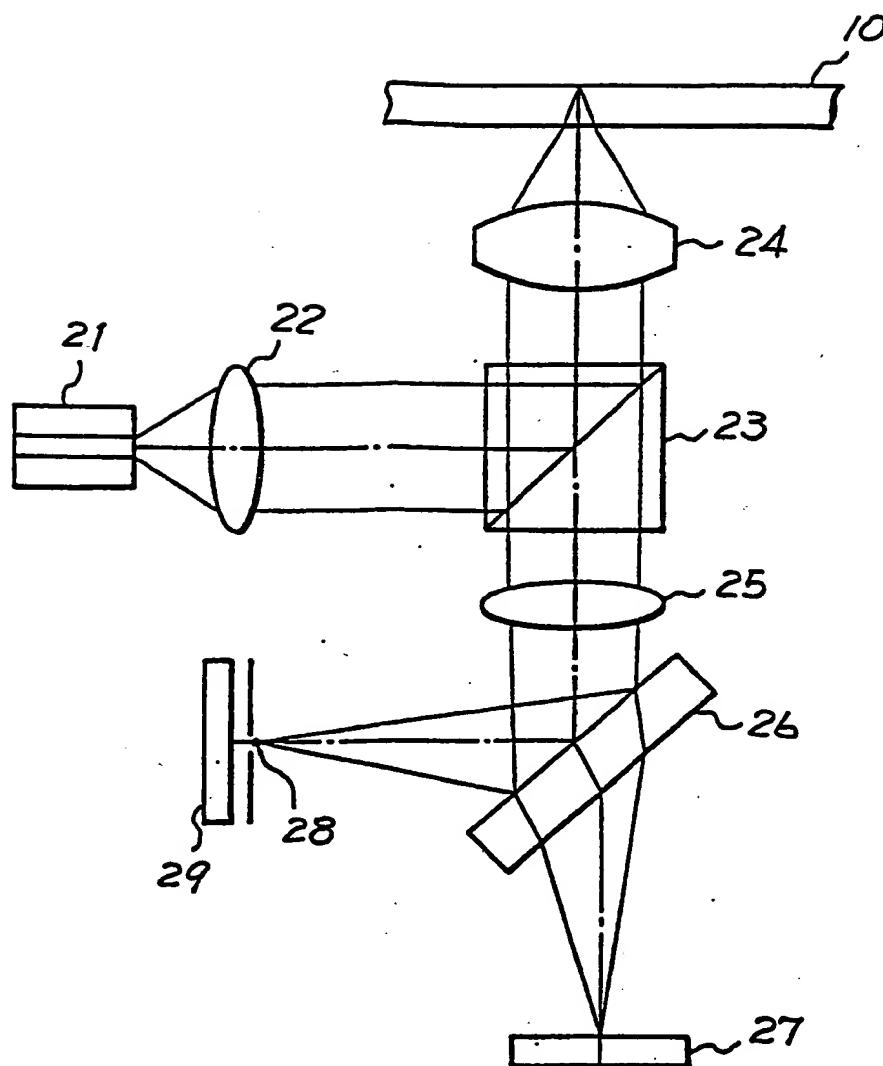

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) Publication number:

**0 354 601 A3**

(12)

**EUROPEAN PATENT APPLICATION**

(21) Application number: 89200737.8

(51) Int. Cl.<sup>5</sup>: **G11B 7/24, G11B 7/00**

(22) Date of filing: 22.03.89

(30) Priority: 12.08.88 JP 202542/88


(43) Date of publication of application:  
14.02.90 Bulletin 90/07(84) Designated Contracting States:  
FR NL(88) Date of deferred publication of the search report:  
29.05.91 Bulletin 91/22(71) Applicant: **PIONEER ELECTRONIC  
CORPORATION**  
No. 4-1, Meguro 1-chome

Meguro-ku Tokyo 153(JP)

(72) Inventor: Chikuma, Kiyofumi- Pioneer  
Electronic Corporation  
Corp. Res. and Dev. Lab. No. 1-1, Fujimi  
6-chome  
Tsurugashima-machi Iruma-gun Saitama(JP)(74) Representative: Smulders, Theodorus A.H.J.,  
Ir. et al  
Vereenigde Octrooibureaux Nieuwe Parklaan  
107  
NL-2587 BP 's-Gravenhage(NL)(54) Optical information recording medium providing reflected light at two different wavelengths,  
recording apparatus utilizing the same.

(57) Recording medium (10) having islands of light-emitting material (13) in regions formed between a transparent substrate (11), and a reflective layer (14) disposed on one principal surface thereof. The islands of light-emitting material are sensitive to illuminating light incident thereupon, and in response thereto, emit light having a different wavelength than

said illuminating light. Reproducing apparatus separates an overall reflected light from the recording medium into first reflected light corresponding to a reflected scanning light, and second reflected light corresponding to emitted light from the light emitting material.

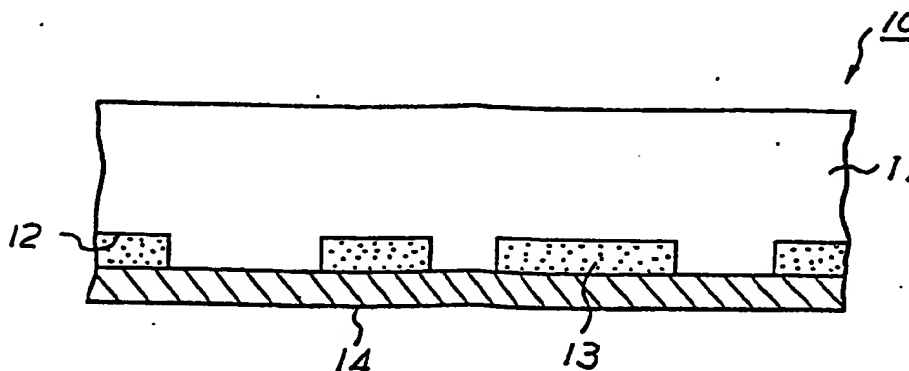**Fig. 1****EP 0 354 601 A3**



European  
Patent Office

## EUROPEAN SEARCH REPORT

Application Number

EP 89 20 0737

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.5)
X,Y	EP-A-0 164 577 (KABUSHIKI KAISHA TOSHIBA) * abstract * * page 3, lines 13 - 21 @ page 13, lines 9 - 13 @ page 14, line 11 - page 15, line 6 @ page 25, line 26 -page 26, line 11; figure 6 *	1-5,14, 15,17,18, 6-13,16	G 11 B 7/24 G 11 B 7/00
Y	EP-A-0 268 482 (CANON KABUSHIKI KAISHA) * abstract * * page 3, lines 61 - 65 *	6-8,11,16	
Y	PATENT ABSTRACTS OF JAPAN vol. 12, no. 233 (P-724)(3080) 05 July 1988, & JP-A-63 25851 (KONICA CORP) 03 February 1988, * the whole document *	9,10	
Y	DE-A-3 638 838 (SCHNUR) * column 6, lines 18 - 19; figure 4 *	12,13	
			TECHNICAL FIELDS SEARCHED (Int. Cl.5)
			G 11 B
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of search 15 February 91	Examiner ANNIBAL P.S.
<div>CATEGORY OF CITED DOCUMENTS</div> <div>X: particularly relevant if taken alone Y: particularly relevant if combined with another document of the same category A: technological background O: non-written disclosure P: intermediate document T: theory or principle underlying the invention</div> <div>E: earlier patent document, but published on, or after the filing date D: document cited in the application L: document cited for other reasons &amp;: member of the same patent family, corresponding document</div>			